

Contractor Grade LED tube T8

11943784



The new family in Corepro tiering but for different target customer

Philips Contractor Grade LEDtubes are the quick and easy way to replace T8 fluorescent or other LED tubes with a fast pay back time. Not only does the range of LEDtubes require a low initial investment, but LED energy efficiency also delivers instant savings that you can bank on over a long and reliable lifetime. Plus, with the same lamp size and light distribution as fluorescent alternatives, you'll never know the difference. You don't need to pay attention to the driver technology anymore, Contractor Grade LEDtube installs in luminaires operating on mains power connection. So simple to operate!

Benefits

- Highly energy-efficient
- Easy installation
- Conventional form factor to fit into existing luminaire
- No mercury

Applications

- Hospitality
- retail
- office
- industrial and home applications

Versions




CorePro LEDtube 1200mm
T8C W G 20240726

Features

- Reduced operational cost thanks to lower energy consumption
- Lower maintenance cost thanks to 2-3 times longer lifetime than conventional lamps
- Fastest and easiest way to upgrade existing luminaires to LED technology
- Completely safe product and installation process

Dimensional drawing

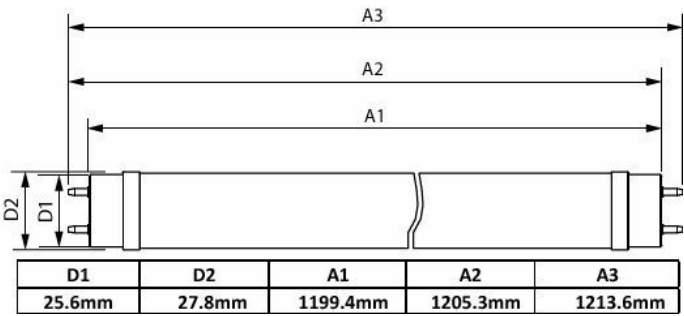

Product	D1	D2	A1	A2	A3
COR CNG LEDtube 1200mm 16W 865 T8 I	25.6 mm	27.8 mm	1,199.4 mm	1,205.3 mm	1,213.6 mm
COR CNG LEDtube HO 1200mm 18W 865 T8 I	25.6 mm	27.8 mm	1,199.4 mm	1,205.3 mm	1,213.6 mm

General Information

Cap-Base	G13
Nominal lifetime	30,000 hour(s)
Switching Cycle	50,000

Light Technical

Color Code	865 [CCT of 6500K]
Beam Angle (Nom)	240 degree(s)
Correlated Color Temperature (Nom)	6500 K
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	0.7 %

Operating and Electrical

Input Frequency	50 to 60 Hz
Wattage Equivalent	36 W
Starting Time (Nom)	0.5 s

Temperature

T-Case Maximum (Nom)	65 °C
----------------------	-------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Shape	T8
------------	----

Approval and Application

Ambient temperature range	-20 to +45 °C
---------------------------	---------------

Light Technical

Order Code	Full Product Name	Luminous Flux
929001999908	COR CNG LEDtube 1200mm 16W 865 T8 I	1,800 lm
929002000108	COR CNG LEDtube HO 1200mm 18W 865 T8 I	2,100 lm

Operating and Electrical

Order Code	Full Product Name	Power Consumption
929001999908	COR CNG LEDtube 1200mm 16W 865 T8 I	16 W
929002000108	COR CNG LEDtube HO 1200mm 18W 865 T8 I	18 W